HP Metal Jet S100 Printing Solution



Reinvent business opportunities with digitally driven metal 3D Printing for mass production





Accelerate innovative designs and products, and efficiently produce high-quality 3D metal parts at scale











Accelerate innovative designs and products

- Embrace design freedom and achieve:
 - Efficient flow of various mediums (gasses, fluids, heat, etc.) through optimized design profiles that help minimize loss—such as pressure drops and resistance.
 - Improved strength-to-weight ratio for lightweight parts.
 - Simplified manufacturing processes with part consolidation.
 - Innovative, high-quality products—such as industrial filters—with HP's density control.
- Differentiate your products with mass customization—of consumer goods, auto parts, and medical instruments.
- Accelerate time to market with fast design iterations and digital simulation capability—e.g., sinter simulation; easily and rapidly iterate and adjust part design to help avoid deformation during the sintering process.




Efficiently 3D print metal parts at scale



- Achieve industrial Overall Equipment Effectiveness (OEE) with a digital end-to-end solution that delivers:
 - Operational efficiency enabled by device status and KPI monitoring with HP Metal Jet Software Solutions.
 - Maximum system uptime with an industrial-grade printing system designed for 24/7 manufacturing conditions.
 - Comprehensive set of proactive, preventive, and responsive maintenance delivered by HP Metal Jet Solution Services.
- Reduce manual labor and improve operational efficiency with automated features:
 - HP Metal Jet Powder Removal Station automates removal and recovery of loose powder which is 100% reusable¹ while simultaneously performing build unit cleaning.
 - Speed up production and minimize the potential for human error in powder management processes with the HP Metal Jet Powder Management Station, which automatically mixes, sieves, and loads powder to the build unit.
 - HP Metal Jet API enables digital orchestration of the production workflow for routing and monitoring of jobs.
- Help lower costs and reduce time to production from
- months to days vs. analog methods by eliminating time-consuming tooling and manufacturing processes.

Deliver top quality from a trusted global industry leader

- Rely on 30 years of HP Thermal Inkjet expertise in 2D and 3D printing for industrial production-grade quality.
- Meet demanding industry standards²:
 - Enable repeatable parts and reliable process control at speed with up to 4 times nozzle redundancy³ from 2 print bars and HP voxel-level 1200 x 1200 dpi 3D printing resolution.
 - Achieve consistent layer quality with a recoating system that delivers precise tolerances.

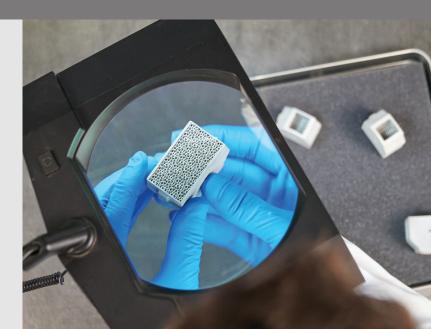

Scale growth with HP's flexible offering


Explore the different ways you can adopt and scale 3D metal printing with the HP Metal Jet S100 Printing Solution.

- Access HP's metal printing technology outright for repeatable results, clean workflows, and industrial production-grade part quality.
- Select a subscription plan that best fits your business needs and benefit
 from a predictable, affordable, and convenient payment model with fixed
 monthly costs and less upfront investment. Subscription plans include
 hardware, software, material, consumables, services, and value-added
 services⁴, and give flexibility to cancel, upgrade, or downgrade based on
 your needs.
- Order the HP Metal Jet printed parts you need via the HP Metal Jet Production Service.⁵



Streamline your process workflow—from design to final part—with the HP Metal Jet S100 Printing Solution

Produce metal parts at scale that achieve industrial OEE and reduce manual labor with automated systems and features.

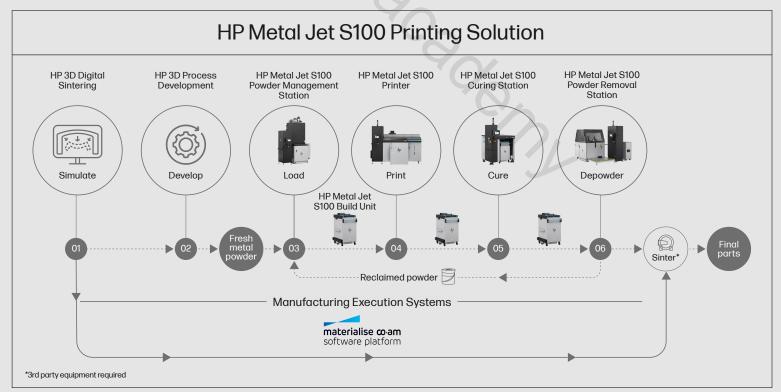

- 1 Simulate the impact of sintering on your HP Metal Jet part and 2 access and use a suite of parameter settings to conduct and control process development experiments.
- 3 Before printing, the HP Metal Jet S100 Powder Management Station (Load) automatically blends, sieves, and loads metal powder into the HP Metal Jet S100 Build Unit according to the user-defined print job and customized parameters.
- ① Once printing (Print) and ③ curing (Cure) are complete, the HP Metal Jet S100 Build Unit is manually inserted into ③ the HP Metal Jet S100 Powder Removal Station (Depowder), which automates the removal and recovery of loose powder for 100% reusability, while simultaneously performing build unit cleaning. For any fine powder remaining on printed parts, the HP Metal Jet S100 Powder Removal Station includes separate vacuum attachments that enable manual removal of the remaining fine powder. All reclaimed powder is pneumatically recovered into the HP Metal Jet S100 Powder Management Station Portable Tank for storage and reintroduced into ③ the HP Metal Jet S100 Powder Management Station.

HP Digital Production Suite—delivering the science and power of HP Metal Jet technology

HP Digital Production Suite provides the control and analytics required to scale additive manufacturing for a complete supply chain solution.

Design

Development

Production



Design

Development


Production

HP 3D Digital Sintering



Al enhanced sintering prediction for HP Metal Jet printed parts with near zero mesh repair and the power to handle high model complexity.

HP 3D Process Development



Expand HP Metal Jet applications with access to a full suite of process parameter settings. Experiment and create processes designed to scale.

Maintain a library with your testing procedures and control process development across a distributed supply chain.

Design

Development

Production

HP 3D Build Manager



Quickly and easily prepare your jobs for printing with all the elements you need.

HP3D Command Center



Client/server application for system setup, registration, device monitoring, and connectivity management.

HP 3D Center



Cloud-based dashboard delivers timely and historical data for greater productivity and efficiency.

Integration with industry-leading software partners



AUTODESK







Explore new application designs with HP Metal Jet stainles steel materials

Today, the HP Metal Jet S100 Printing Solution utilizes two stainless steel powders with process parameters that achieve MPIF 35 properties. Additionally, other materials have been evaluated and can be developed for specific applications and properties.



HP Metal Jet SS 316L—extreme resistance to corrosion and high temperatures

This material is a non-magnetic austenite stainless steel used in applications requiring extremely high corrosion resistance, excellent elongation, ductility, and strength at elevated temperatures. The high alloy and low carbon content makes it a great fit for automotive, aerospace, medical, jewelry, and oil/chemical industries.

HP Metal Jet SS 17-4PH-high strength and wear resistance

This material is a martensite precipitation hardening stainless steel used in applications that require a combination of high strength and mechanical properties with good corrosion and wear resistance. Properties can be tailored through heat treatment, making this versatile material valuable for a wide use of applications in the medical, aerospace, marine, food processing, and automotive industries.



Enhance your customer journey to scale production with HP Digital Production Services

HP Digital Production Services provide your business with a comprehensive suite of onboarding, maintenance, and professional services to help you achieve the most value with HP Metal Jet technology.



HP Metal Jet Onboarding Services

Launch and scale your HP Metal Jet S100 Printing Solution with installation and training onboarding services designed to quickly and efficiently get your team, equipment, and site up and running.

HP Metal Jet Maintenance Services

Maximize your Overall Equipment Effectiveness (OEE) with proactive, preventive, and responsive HP Metal Jet Maintenance Services tailored to your operational needs.







HP Metal Jet Professional Services

Optimize and accelerate your application designs as well as process and new material development efforts with HP Metal Jet Professional Services customized to help you achieve your desired part quality and production outcomes.

Achieve final part properties with post-processing: sintering and finishing





HP supports your entire workflow, from initial idea to final part—even going beyond the HP Metal Jet Printing process—to cover your entire ecosystem, including sintering and surface finishing assistance if required.⁶

When it comes to sintering, HP Metal Jet Professional Services can provide assistance with sintering operation requirements. Specific sintering profiles have been developed for each qualified material that meet industry standards.² Additionally, assistance can be provided to develop new profiles for other specific materials.

After printing and sintering, if additional finishing is required, HP's engineering team can provide services that help you achieve your final desired part properties using alternative processes (such as machining, polishing, coating, and hot isostatic pressing).

Leverage Binder Jetting technology and HP's expertise in additive manufacturing

AM advantages over traditional metal manufacturing	Binder Jetting 3D printing advantages over other 3D printing processes	HP Metal Jet technology advantages
Enables innovative new designs for: Lightweight or consolidated parts Performance improvements Customization Improves customer economics: Reducing manufacturing process steps Reducing manual labor	Offers higher productivity: Processing layer by layer versus point process Isotropic properties for better surface finishing (i.e., requiring less post-processing) No support removal required Uses metal powders from established global powder suppliers, which are less expensive than laser-based 3D printing powders.	Printhead advantage: HP Thermal Inkjet technology drives economics Higher resolution drives part quality (including surface finish and accuracy) HP Metal Jet binding agent advantage: Leverages IP from HP Latex Uses a minimum of binder, allowing for thicker and larger mass parts than metal injection molding (MIM).


Benefit from 80 years of HP heritage

HP has an 80-year history of innovation, including 30 years of HP Thermal Inkjet expertise in 2D and 3D printing. As a result, HP Metal Jet is the latest technology, designed specifically for industrial production-grade quality of 3D metal parts, building further on this strong heritage.

HP Thermal Inkjet (TIJ) printheads and nozzle arrangement contribute to part quality and cost reduction

HP Metal Jet printers employ multiple printbars for high productivity and nozzle redundancy. The printhead is a complex, integrated system that controls how and where to apply fluids. It allows HP Metal Jet to accurately apply the binder to produce stronger parts with outstanding definition. Each printhead produces a 108-mm (4.25-inch) print swath with two independent columns of 5,280 nozzles that are spaced 1200/inch in each column. There are two independent supply ports for HP Metal Jet binding agent and two built-in pressure regulators.

HP Metal Jet printers address a 1200 x 1200 dpi grid with a layer typically between 35 and 140 microns thick. HP Metal Jet's high voxel resolution produces fine details and precision definition of edges and surfaces both inside and outside the part. Defects are suppressed with 4-times nozzle redundancy.³

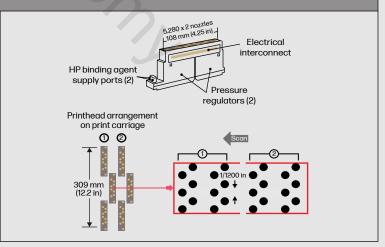

HP Metal Jet binding agent-key enabler for higher quality and productivity

HP Metal Jet binding agent is formulated with a polymer that binds the metal particles together wherever HP Metal Jet binding agent is printed. This binding agent produces thicker-walled parts more quickly than metal injection molding (MIM). Even better, no wax debinding is required with this process, which can save up to 20 workflow hours compared to traditional MIM.⁷

Technical specifications

HP Metal Jet S100 Printing Solution

Printer Performance	Technology	HP Metal Jet technology	
	Build platform volume	430 x 309 x 200 mm	
	Effective build volume ⁸	430 x 309 x 140 mm	
	Building speed	1990 cc/hr ⁹	
	Layer thickness	35 - 140 μm	
	Job processing resolution (x,y)	1200 dpi	
	Printer resolution (x,y)	1200 dpi	
	Printhead system	2 print bars/ 6 HP Thermal Inkjet printheads (63,360 nozzles)/ Automatic nozzle health detector and nozzle replacement	
	Print redundancy	4-times nozzle redundancy at 1200 dpi resolution³	
Printer dimensions	Printer	2937 x 1409 x 2478 mm	
(w x d x h)	Shipping	3330 x 1500 x 2340 mm	
	Operating area	4775 x 3850 x 2500 mm	
Build unit	Physical	657 x 872 x 1170*	
dimensions (w x d x h) *Including cover	Shipping	780 x 1000 x 1410 mm	
Curing station	Physical	1350 x 1486** x 2250 mm	
dimensions (w x d x h)	Shipping	1560 x 1770 x 2150 mm	
**Including front panel	Operating area	3150 x 3775 x 2500 mm	
Weight	Printer	851 kg	
	Build unit	261 kg	
	Curing station	400 kg	
Network	Gigabit Ethernet (10/100/1000Base-T), supporting the following standards: TCP/IP, DHCP (IPv4 only), TLS/SSL		
Processor and memory	Processor	HP Metal Jet S100 Printer: Intel® Xeon® W-2255 3.7GHz 10C 165W	
		HP Metal Jet S100 Curing Station: Intel® Celeron® J3455 1.5 GHz Quad-Core	
	Memory	HP Metal Jet S100 Printer: 128 GB DDR4	
		HP Metal Jet S100 Curing Station: 4G DDR3L memory	
	Hard disk	HP Metal Jet S100 Printer: 1 TB PCIe NVMe TLC SSD	
		HP Metal Jet S100 Curing Station: SSD 240 GB	
	Industrial safety PLC	HP Metal Jet S100 Printer and HP Multi Jet S100 Curing Station:	
		Siemens SIMATIC ET 200SP, CPU 1512SP F-1 PN	
		300 KB/1 MB 3 Ports SIMATIC S7 MEMORY CARD 24 MB	

Software	HP Metal Jet	HP 3D Digital Sintering
	Software Solutions	HP 3D Process Development
		HP 3D Build Manager
		HP 3D Command Center
		HP 3D Center
	Compatible software	Autodesk Fusion 360
		Autodesk Netfabb Premium and Ultimate
		Materialise HP Plugin
		Simufact Additive by Hexagon/MSC
		Altair® Inspire™ Print 3D
	Supported file formats	STL, 3MF
Power	Consumption	HP Metal Jet S100 Printer: 8 kW
		HP Metal Jet S100 Curing Station: 3 kW
	Requirements	HP Metal Jet S100 Printer: 3phase, 3W + N + PE, 220-240 / 380-415 Vac, 30 A max., 50/60 Hz 8 kW; or 3phase, 3W + PE, 200-240 Vac, 48 A max., 50/60 Hz, 8 kW
		HP Metal Jet S100 Curing Station: 3phase, 3W + N + PE, 220-240 / 380-415 Vac, 16 A max., 50/60 Hz 3 kW; or 3phase, 3W + PE, 200-240 Vac, 28 A max., 50/60 Hz, 3 kW
Certifications and statement	Safety	EU: Machinery Directive compliant, EN 60204-1, EN 12100-1, EN 13849-1, EN 13849-2, EN 1127-1 US/Canada: UL 2011, CSA C22.2 No.14-18
	Electromagnetic	Compliant with Class A requirements, including USA (FCC rules), Canada (ICES), EU (EMC Directive)
	Environmental statement	REACH
Warranty & Service Coverage included	One-year limited hardware warranty	

Technical specifications

HP Metal Jet S100 Powder Management Station

Technology Mixer capacity Speed range Sieving technology Material transport speed ¹⁰	HP Metal Jet technology 78 liters (max weight: 350 kg) 14.3 rpm to 27.6 rpm 90 µm replaceable mesh with Ultrasonic Technology and
Speed range Sieving technology	14.3 rpm to 27.6 rpm 90 µm replaceable mesh with Ultrasonic Technology and
Sieving technology	90 µm replaceable mesh with Ultrasonic Technology and
	Ultrasonic Technology and
Material transport speed ¹⁰	external port for vacuum cleaning
	2.5 I/min (based on HP Metal Jet SS 316L material and bulk density, measured with HP Metal Jet S100 Powder Management Station Vacuum Pump)
Build unit load speed ¹¹	2.5 l/min (based on HP Metal Jet SS 316L material and bulk density)
Station	System: 2040 x 2105 x 3170 mm
Operating area	System: 4100 x 3500 x 3170 mm
System	1348 kg
Gigabit Ethernet (10/100/1000Base-T), supporting the following standards: TCP/IP, DHCP (IPv4 only), TLS/SSL	
Processor	Intel® Celeron® J3455 1.5 GHz Quad-Core
Memory	4G DDR3L memory
Industrial PLC	Siemens SIMATIC ET 200SP Open Controller, CPU 1515SP PC2 F (Windows 10)
Consumption	Basic 4 kW (with Vacuum Pump 7 kW)
Requirements	3phase, 3W + PE, 380-415 Volts (line-to-line) (±10%) 3phase, 3W + PE, 480 Volts (line-to-line) (±10%) Maximum load current (per phase) 16 Amperes 50/60Hz
Safety	CE compliant according to Machinery Directive 2006/42/EC: EN 60204-1, EN 12100, EN 13849-1, EN 13849-2, EN 1127-1
	US/Canada: UL 2011, CSA C22.2 No.14-18
Electromagnetic	Compliant with Class A requirements, including USA (FCC rules), Canada (ICES), EU (EMC Directive)
Environmental statement	REACH
One-year limited hardware warranty	
	Station Operating area System Gigabit Ethernet (10/100/100 standards: TCP/IP, DHCP (IP) Processor Memory Industrial PLC Consumption Requirements Safety Electromagnetic Environmental statement

HP Metal Jet S100 Powder Removal Station

Performance	Technology	HP Metal Jet technology
	Automatic coarse depowder	Powder recovery with vibration control
	Build unit cleaning	Enclosed material recovery from build unit with optional manual vacuum cleaning
Dimensions	Station	System: 1680 x 1640 x 2200 mm
(w x d x h)	Operating area	System: 4600 x 3500 x 2615 mm
Weight	System	1086 kg
Network	Gigabit Ethernet (10/100/1000Base-T), supporting the following standards: TCP/IP, DHCP (IPv4 only), TLS/SSL	
Processor and memory	Processor	Intel® Celeron® J3455 1.5 GHz Quad-Core
	Memory	4G DDR3L memory
	Industrial PLC	Siemens SIMATIC ET 200SP Open Controller, CPU 1515SP PC2 F (Windows 10)
Power	Consumption	Basic 1 kW (with vacuum pump 4 kW)
	Requirements	3phase, 3W + PE, 380-415 Volts (line-to-line) (±10%) 3phase, 3W + PE, 480 Volts (line-to-line) (±10%) Maximum load current (per phase) 7 Amperes 50/60Hz
Certifications and statement	Safety	EU: Machinery Directive compliant, EN 60204-1, EN 12100-1, EN 13849-1, EN 13849-2, EN 1127-1
		US / Canada: UL 2011, CSA C22.2 No.14-18
	Electromagnetic	Compliant with Class A requirements, including USA (FCC rules), Canada (ICES), EU (RED Directive)
	Environmental statement	REACH
Warranty & Service Coverage included	One-year limited hardware warranty	

Ordering information

Prin	ter	sys	tem
------	-----	-----	-----

Trinter system		
	50V69B	HP Metal Jet S100 Printer
	50V67B	HP Metal Jet S100 Build Unit
	6N9K6A	HP Metal Jet Build Unit Curing Station Cover
	50V68B	HP Metal Jet S100 Curing Station
Powder Processing	system	
Powder Management Station	50P69B	HP Metal Jet S100 Powder Management Station
	6W7L5A	HP Metal Jet S100 Powder Management Station Changeover Kit
	72R36A	HP Metal Jet S100 Powder Management Station Vacuum Pump Cables
Powder Removal Station	227Z8B	HP Metal Jet S100 Powder Removal Station
	6W7L2A	HP Metal Jet S100 Powder Removal Station Starter Kit
	6W7L1A	HP Metal Jet S100 Powder Removal Station Storage Drum 85L
	5R8W3A	HP Metal Jet S100 Powder Removal Station Platform
	6W7L4A	HP Metal Jet S100 Powder Removal Station Changeover Kit
	72R37A	HP Metal Jet S100 Powder Removal Station Vacuum Pump Cables
Powder Management and Removal Stations	6L053A	HP Metal Jet S100 Powder Management and Removal Station Vacuum Pump
HP Metal Jet process	6C2Y3A	HP 3DM200 Printhead
consumables	V1Q93A	HP 3DM100 Cleaning Roll
	7B741A	HP 3DM100 Build Unit Filter Sheets
	6C2Y4A	HP 3DM200 Binding Agent 5L
HP Metal Jet	V1R43A	HP Metal Jet SS 316L, 20 kg
stainless steel materials	V1R44A	HP Metal Jet SS 17-4PH, 15 kg

r	HP Metal Jet Onboarding	HP Metal Jet Installation Services (HP Metal Jet Operator Training and
Jnit	Services	Certification included)
uring		HP Metal Jet Design, Process, and Part Quality Trainings
g Station		HP Metal Jet Post-Installation Training
er	HP Metal Jet Maintenance	HP Metal Jet Maintenance Service-Level Agreements
er	Services	HP Metal Jet Recertification Service
angeover Kit		HP Metal Jet Uptime Kits
er		HP Metal Jet Train-to-Maintain Training
cuum Pump		HP Metal Jet Material Changeover Service
er Removal	HP Metal Jet Professional	HP Metal Jet Application Evaluation and Benchmarking Service
er Removal er Removal	Services	HP Metal Jet Application Design Optimization Service
or Removal		HP Metal Jet Application and Process Engineering Consultation Service
er Removal		HP Metal Jet Materials Development Service
or removal		HP Metal Jet Production Readiness
er Removal ables	(C)	Service
er val Station		
I		
ter Sheets	· / / / / / / / / / / / / / / / / / / /	
nt 5L		
kg	3	
 15 kg		



Connect with an HP Metal Jet expert or sign up for the latest news about HP Metal Jet Printing: hp.com/go/3DmetalsContactus

- 1. Powder removal involves a mix of automated and manual processes, where trace amounts of loose powder may be lost.
- 2. Meets ASTM and MPIF standards for stainless steel.
- 3. To achieve 4 times nozzle redundancy, nozzles are aligned so that four nozzles print the same 1/1200-inch dot row in the powder bed. This means up to four different nozzles can print HP Metal Jet binding agent in the same 1200 dpi grid point, helping to suppress defects. For more information, see https://px.ncm/metaliet-whitepaper.
- 4. Value-added services are technical support services provided by application or process engineers.
- 5. HP does not provide manufacturing services. Customers work directly with and pay for manufacturing services provided by a trusted third-party manufacturing partner responsible for fulfilling the order. HP provides design compatibility check for HP Metal Jet printing. Metal Jet Production Service is available in the US and Western Europe.
- 6. Additional fee may be required for sintering and finishing support services.
- 7. Compared to metal injection molding, a time-consuming debinding process is unnecessary with HP Metal Jet technology, taking up to 20 hours out of the workflow.
- 8. Meets MPIF standards for stainless steel with HP Metal Jet SS 316L and HP Metal Jet SS 17-4PH materials.
- 9. In the case of a layer thickness of 50 microns, actual build speed is affected by build depth, materials, and processing parameter settings.
- 10. Material transport speed: considers transport from the HP Metal Jet S100 Powder Management Station Portable Tank to the HP Metal Jet S100 Powder Management Station using the HP Metal Jet S100 Powder Management and Removal Station Vacuum Pump.
- 11. Build unit load speed: considers material discharge from the HP Metal Jet S100 Powder Management Station (including sieving and compaction) to the HP Metal Jet S100 Build Unit.

© Copyright 2022-2023 HP Development Company, L.P.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty, HP shall not be liable for technical or editorial errors or omissions contained herein.

4AA8-1958ENW, April 2023

